


		Model Description
1525	D_a (mm)	Outer Dia.
1235	D_i (mm)	Inner Dia.(Di)
119.4	H (mm)	Overall Height(H)
1480	L_a (mm)	Ext.Bolt Circle Dia.(La)
VARIABLE 1325 1330 1335	L_i (mm)	Internal.Bolt Circle Dia.
35	n_1	No. of Holes at outer Ring
26	n_2	No. of Holes at inner Ring
25	A (mm)	Bolt Hole Dia.(A)
25	B (mm)	Bolt Hole Dia.(B)
60	t (mm)	Thread Length.(t)
1400	ϕO (mm)	Diameter.(O)
1410	ϕU (mm)	Diameter.(U)
97	H_1 (mm)	Ring Height(H1)
110	H_2 (mm)	Ring Height(H2)
9.4	H_a (mm)	Distance (H_a)
22.4	H_u (mm)	Distance (H_u)
1260	ϕd (mm)	Gear P.C.D.
14	m (mm)	Module(m)
90	Z	No. Of Teeth(Z)
Grease		Lubrication
4	G (nos)	No. Of Grease Nipples

Type: - Single Row Ball type Internal Toothed Slew Ring.

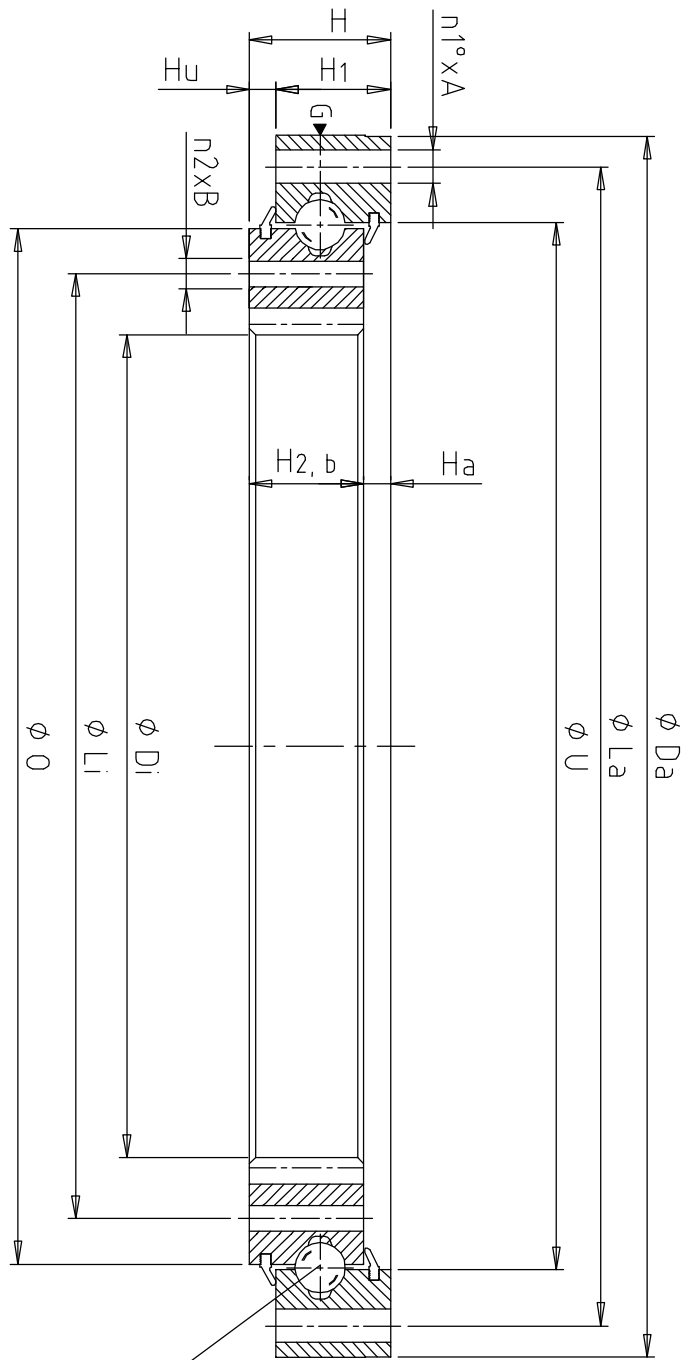

BALL DIA 35MM
NO. OF BALLS - 122

GEAR OD 1286 MM
GEAR ID 1235 MM
NO OF TEETH 90